
	Refrigerated Air Dryer		Rev.	Date	Prepared By	Checked By	Approved By
			1	2019.01.15	LEE.S.M.	JO.S.J.	KIM.H.W.
	Air Cooled Type		2				
			3				
4							
Project Name			-		Model Name		HYD-30N
SPECIFICATION							
1							
2	Supply Voltage	220V	Inlet Flow Rate	3.9	Nm3/min		
3	Phase	1PH	Inlet Pressure	7	barg		
4	Frequency	60Hz	Inlet Temp.	38	°C		
5	Control use	220V	Outlet Flow Rate	3.9	Nm3/min		
6	Fulid	Compressed Air	Outlet Pressure	6.8	barg		
7	Location	Indoor	Outlet Temp.	28±5	°C		
8	Design Code	Maker STD.	Pressure Drop	0.2	bar		
9	Area Class	Non-Hazardous	Outlet Dew Point	2~10	°C		
10			Design Pressure	14	barg		
11			Design Temperature	70	°C		
12			Ambient Temperature	32	°C		
CONSTRUCTION							
13							
14	Refrigerant	R-22	Dimension (W x L x H)	354 X 654 X 864	mm		
15	Ref. Compressor Type	Rotary	Weight	66	kg		
16	Ref. Compressor Capacity	3/4 HP	Power Consumption	0.9	kW		
17	Condenser Type	Air Cooled	Inlet Connection	25A	PT Female Screw		
18	Condenser Fan Motor	66 W	Outlet Connection	25A	PT Female Screw		
19		1 EA	Drain Connection	15A	PT Female Screw		
20	Condenser Fan Size	300 mm	Color (Munsell)	5.7PB 4.1/9.9			
21	Condenser Capacity	3/4 HP		5.7PB 2.9/3.5			
22	Condenser Material	Aluminum & Copper					
23	Heat Exchanger Type	Block					
24	Heat Exchanger Material	Aluminum					
25	Ref. Control Device	Capillary Tube					
26	Temp. Control Device	Hot Gas Bypass Valve					
27	Drain Trap Type	Auto Float					
STANDRAD FEATURES AND CONTROL							
28							
29	Fan Controller	YES	Ref. Compressor	YES			
30	Ref. Liquid Filter Dryer	YES	Capillary Tube	YES			
31	Overload Relay	NO	Hot Gas Bypass Valve	YES			
32	PCB Controller	YES	Air Cooled Condenser	YES			
33	Fan Motor Test Button	NO	Accumulator	NO			
34	Air Pressure Gauge	NO	Liquid Ref. Receiver	NO			
35	Ref. Pressure Gauge	NO	Oil Separator	NO			
36	High Pressure Switch	YES	Circuit Breaker	NO			
37	Moisture Indicator	NO	Ref. Compressor Heater	NO			
38	Drain	YES					
NOTES							
39							
40							
41							
42							
43							
44							
45							
46							





10-N0300-QAH-VSS
CON DWG

COOLING AIR DIRECTION



SPECIFICATION


INLET AIR TEMPERATURE	38°C
AMBIENT TEMPERATURE	32°C
INLET AIR PRESSURE	7 barg
CAPACITY	3.9 Nm ³ /min
IN/OUT CONNECTION	PT 25A
DIMENSION(WXDxH, mm)	354 X 654 X 864
WEIGHT	66 kg
POWER CONSUMPTION	0.9 kW
POWER SUPPLY	220/380/440V - 1PH - 50/60Hz

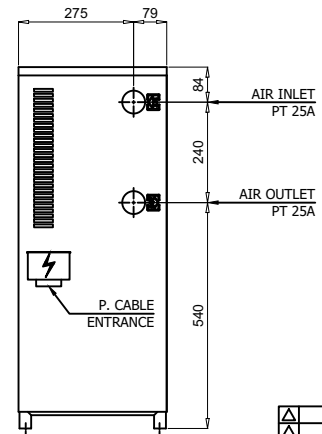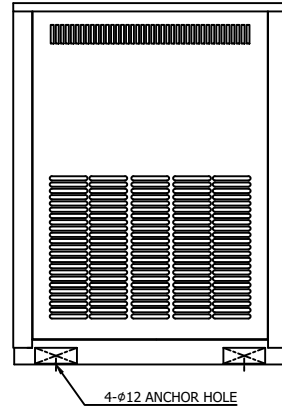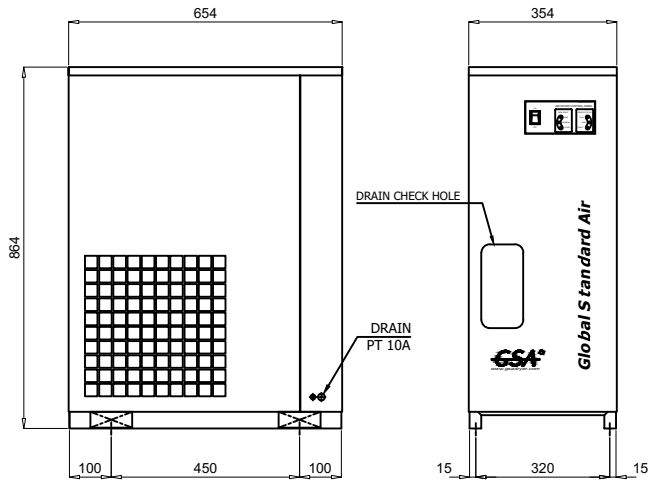


REV	DATE	DESCRIPTION	DWG	CHK	APPD	APPD
△						
△						
△						
△						
△	2020. 03. 20.	CHANGE OF CONTROL PCB				
△	2018. 11. 26.	ISSUED FOR REFERENCE				
PROJECT	-					
MANUFACTURER						
TITLE	OUTLINE DRAWING					
ITEM NO.	HYD-30N	DWG NO.	GSA-HYD-0030N-01			
SCALE	NONE					

Z0-N0300-QAH-VSS
ON DWG

DEW POINT	2~10°C @ FDP		
INLET AIR PRESSURE	7.0 BARG		
INLET AIR TEMPERATURE	38°C		
CAPACITY	3.9 Nm ³ /min		
10	CAPILLARY TUBE	-	1
9	HGBV	-	1
8	AUTO DRAIN	IN : PT 15A / OUT : 6A	1
7	HEAT EXCHANGER	30 HP	1
6	FILTER DRYER	3/8"	1
5	HPS	24 BARG	1
4	FAN CONTROLLER	12 ~ 18 BARG	1
3	FAN MOTOR	66W 4P 9300	1
2	A/C CONDENSER	3/4 HP (CONDENSING CAPACITY)	1
1	REF. COMPRESSOR	3/4 HP (COOLING CAPACITY)	1
NO.	PART NAME	DESCRIPTION	QTY

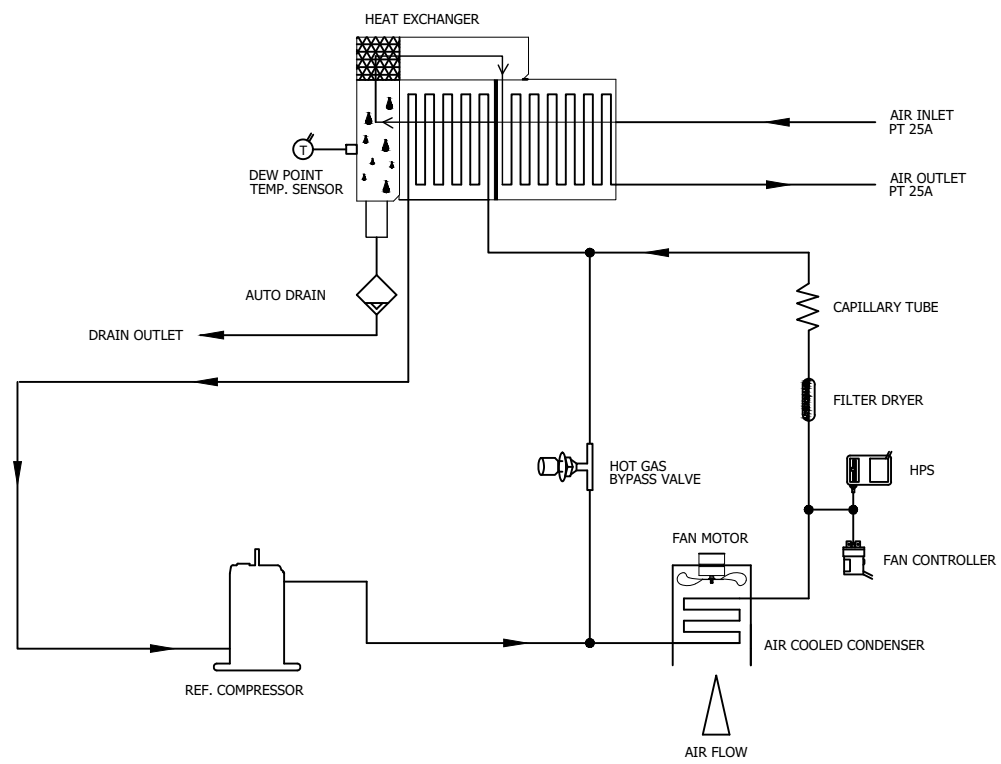

- AIR INLET LINE
- AIR OUTLET LINE
- REF. LOW PRESS. LINE
- REF. HIGH PRESS. LINE

△									
△									
△									
△									
△	2020. 09. 16.	PARTS NUMBER DELETE							
△	2018. 11. 26.	ISSUED FOR REFERENCE							
REV.	DATE	DESCRIPTION	ENG	CHK	APPO	APPO	APPO	APPO	REV.
PROJECT									
MANUFACTURER									
 <small>Global Standard Air & Gas</small>									
TITLE									
PIPING & INSTRUMENTATION DRAWING									
ITEM NO.	HYD-30N	DWG NO.	GSA-HYD-0030N-02						
SCALE	NONE								REV.
(A4 : 297mm x 210mm)									

