





	Eco-Pro Refrigerated Air Dryer		Rev.	Date	Prepared By	Checked By	Approved By
			1	2022.01.11	WOO.I.H.	JO.S.J.	KIM.H.W.
	Air Cooled Type		2				
			3				
4							
Project Name		-	Model Name		HYD-7N2		
SPECIFICATION							
1							
2	Supply Voltage	220V	Inlet Flow Rate	0.8	Nm3/min		
3	Phase	1PH	Inlet Pressure	7	barg		
4	Frequency	60Hz	Inlet Temp.	38	°C		
5	Control use	220V	Outlet Flow Rate	0.8	Nm3/min		
6	Fulid	Compressed Air	Outlet Pressure	6.8	barg		
7	Location	Indoor	Outlet Temp.	28±5	°C		
8	Design Code	Maker STD.	Pressure Drop	0.2	barg		
9	Area Class	Non-Hazardous	Outlet Dew Point	2~10	°C		
10			Design Pressure	14	barg		
11			Design Temperature	70	°C		
12			Ambient Temperature	32	°C		
CONSTRUCTION							
13							
14	Refrigerant	R-134A	Dimension (W x L x H)	248 X 559 X 660	mm		
15	Ref. Compressor Type	Recipro Hemertic	Weight	30	kg		
16	Ref. Compressor Capacity	1/5 HP	Min. Power Consumption	0.15	kW		
17	Condenser Type	Air Cooled	Inlet Connection	15A	PT Female Screw		
18	Condenser Fan Motor	9 W	Outlet Connection	15A	PT Female Screw		
19		1 EA	Drain Connection	10A	PT Female Screw		
20	Condenser Fan Size	230 mm	Color (Munsell)	5.7PB 4.1/9.9			
21	Condenser Type	Wire on Tube		5.7PB 2.9/3.5			
22	Condenser Material	Copper					
23	Heat Exchanger Type	Block					
24	Heat Exchanger Material	Aluminum					
25	Ref. Control Device	Capillary Tube					
26	ECO Mode Control	Dew Point Temp. Control					
27	Drain Trap Type	Auto Float					
STANDRAD FEATURES AND CONTROL							
28							
29	Dew Point Temp. Switch	YES	Ref. Compressor	YES			
30	Ref. Liquid Filter Dryer	YES	Capillary Tube	YES			
31	Overload Relay	NO	Hot Gas Bypass Valve	NO			
32	Power On/Off Switch	YES	Air Cooled Condenser	YES			
33	Fan Motor Test Button	NO	Accumulator	NO			
34	Air Pressure Gauge	NO	Liquid Ref. Receiver	NO			
35	Ref. Pressure Gauge	NO	Oil Separator	NO			
36	High Pressure Switch	NO	Circuit Breaker	NO			
37	Moisture Indicator	NO	Ref. Compressor Heater	NO			
38	Drain	YES	Fan Controller	YES			
NOTES							
39							
40							
41							
42							
43							
44							
45							
46							

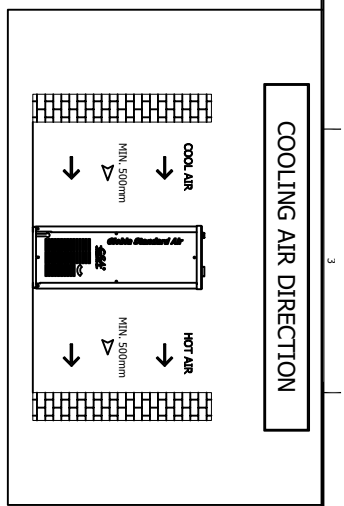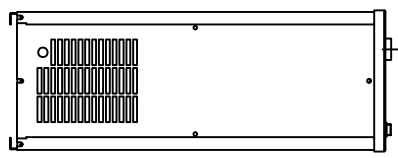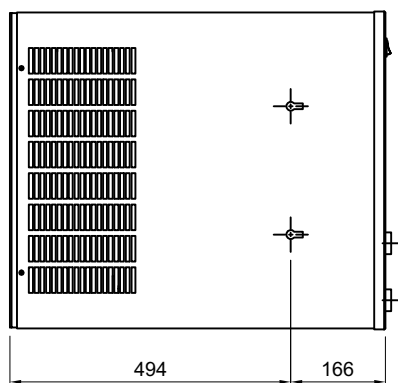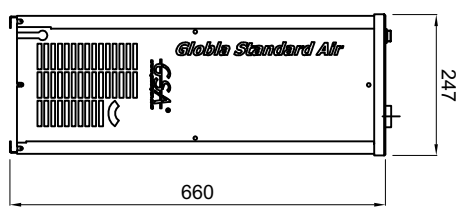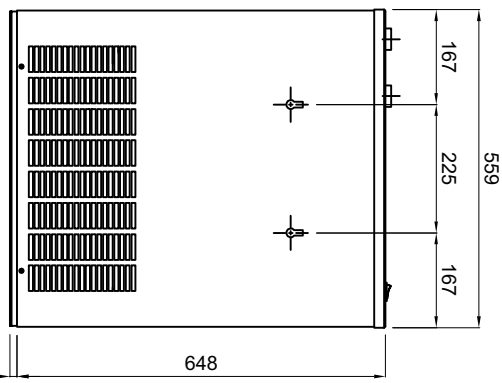

SPECIFICATION	
INLET AIR TEMPERATURE	38°C
AMBIENT TEMPERATURE	32°C
INLET AIR PRESSURE	7 barg
CAPACITY	0.8 Nm³/min
IN/OUT CONNECTION	PT 15A
DIMENSION(WXDXH, mm)	244 X 554 X 754
WEIGHT	30 kg
MIN. POWER CONSUMPTION	0.15 kW
POWER SUPPLY	220V - 1PH - 50/60HZ




ITEM NO.	REV.	DATE	DESCRIPTION	CHK.	APP.	DATE
1	01.11.		ISSUED FOR REFERENCE			
2						
3						
4						
5						
6						
7						
8						

MANUFACTURER: **GSA**
Globe Standard Air

TITLE: **OUTLINE DRAWING**

ITEM NO.: GSA-HHD-0007N2-01
SCALE: NONE
REV.: 01

(A4: 297mm x 210mm)

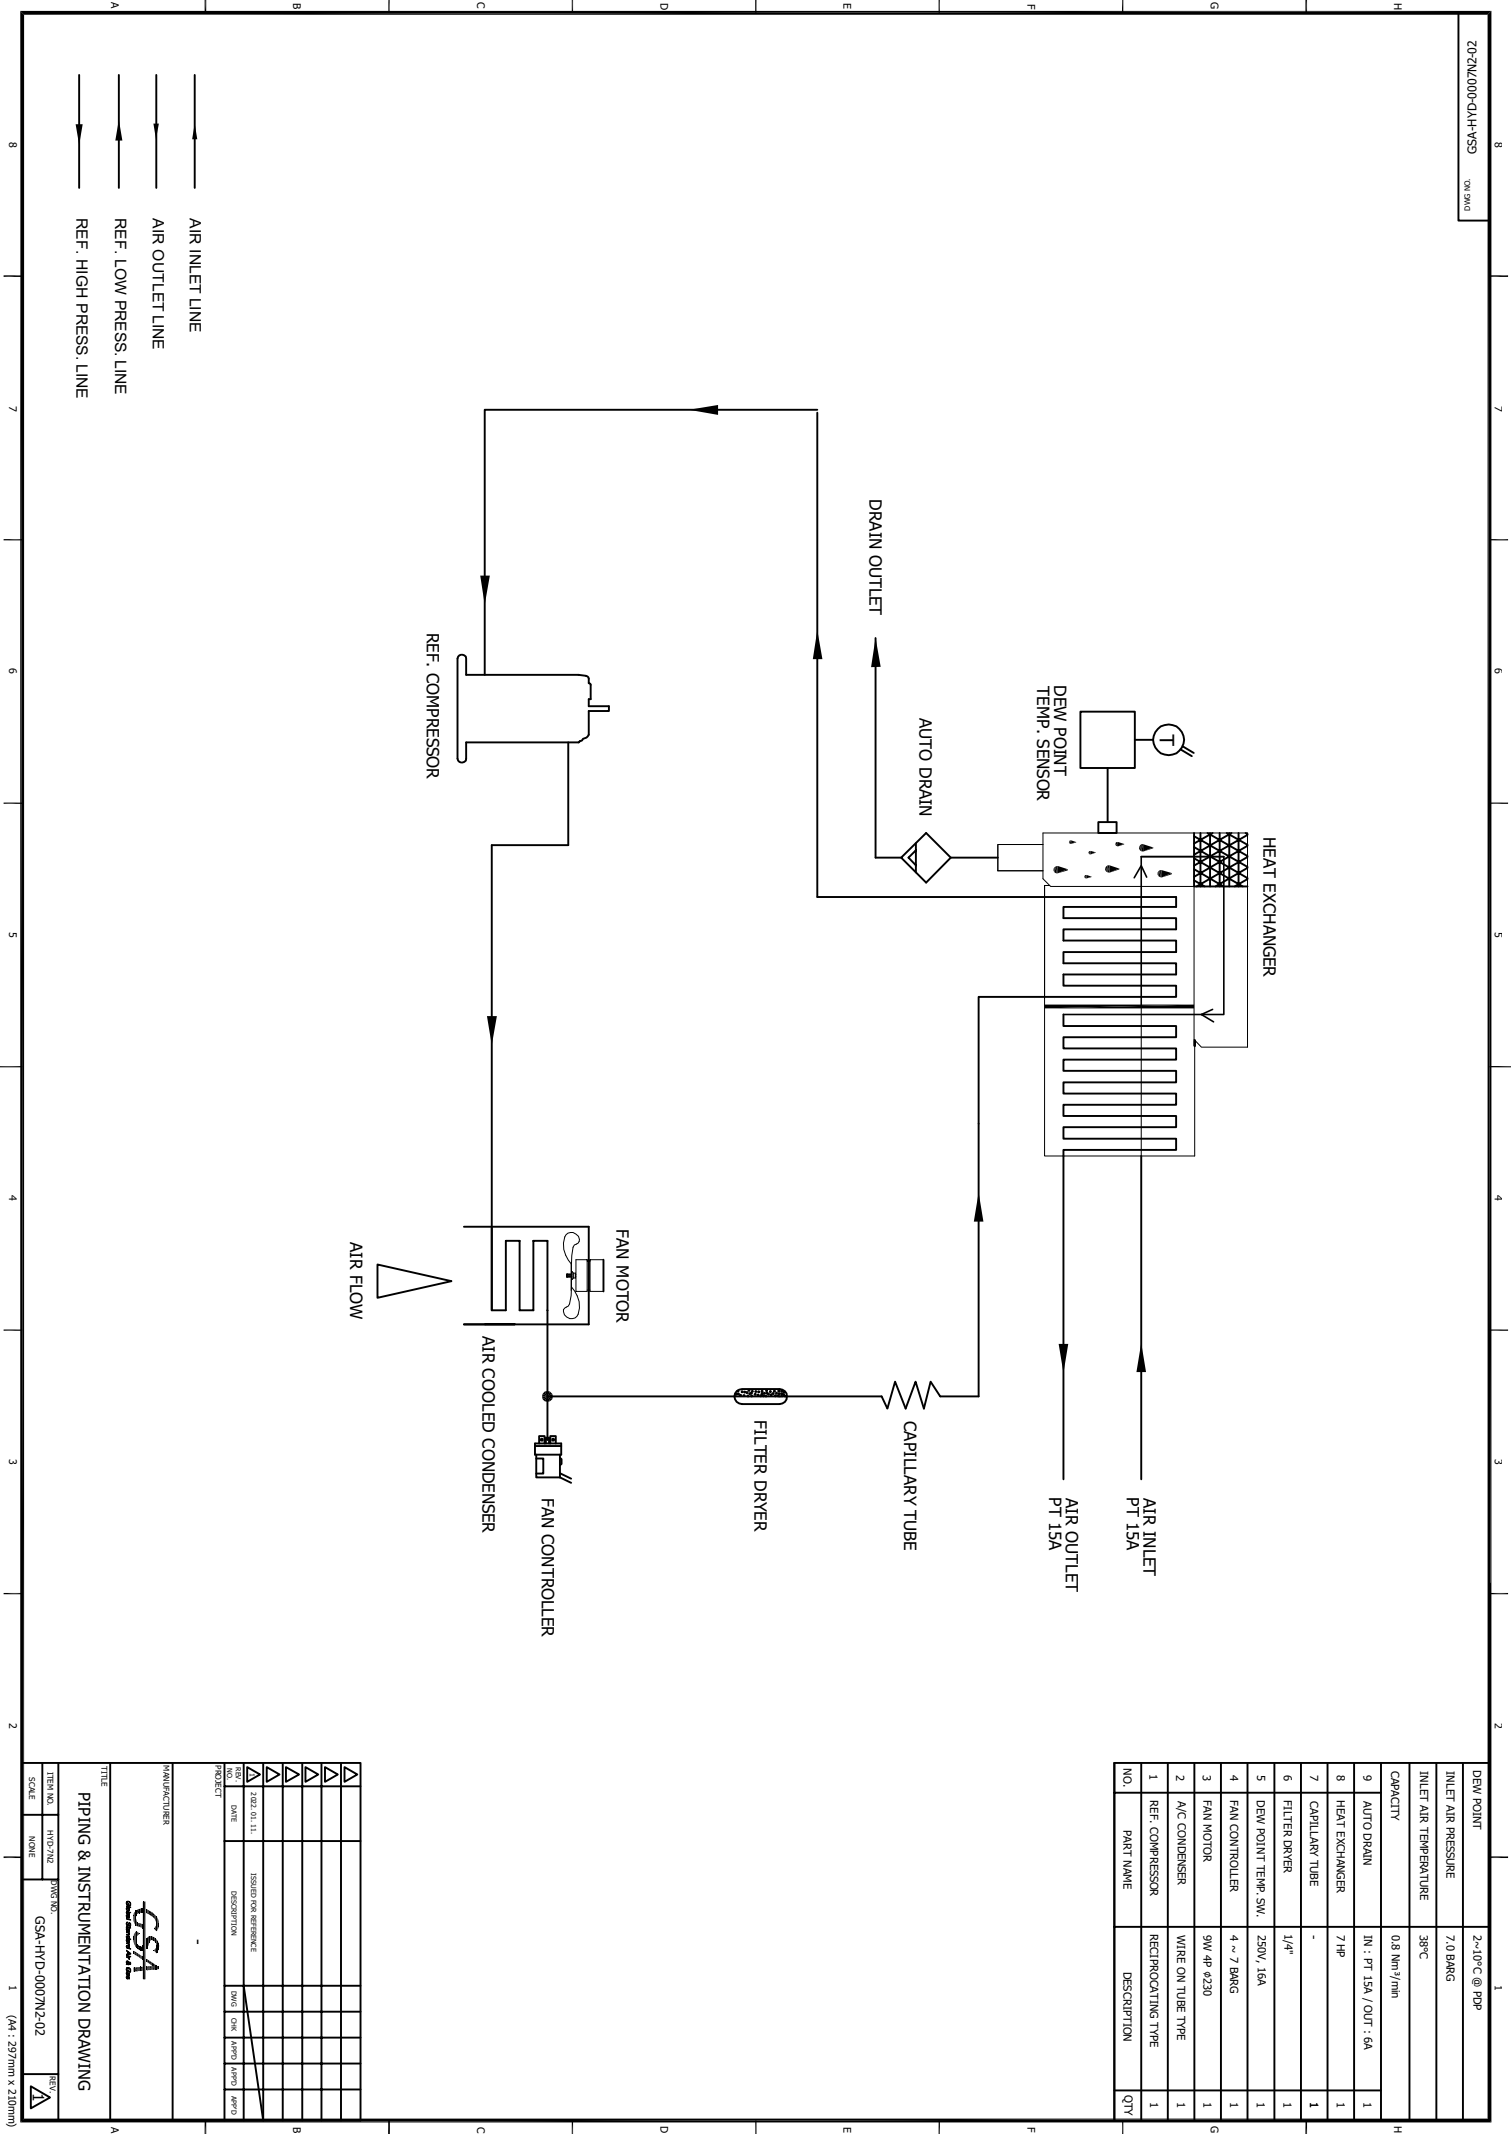

NO.	PART NAME	DESCRIPTION	QTY
	DEW POINT	2-10°C @ RPR	1
	INLET AIR PRESSURE	7.0 BARG	
	INLET AIR TEMPERATURE	38°C	
	CAPACITY	0.8 Nm³/min	
9	AUTO DRAIN	IN : PT 15A / OUT : 6A	1
8	HEAT EXCHANGER	7 HP	1
7	CAPILLARY TUBE	-	1
6	FILTER DRYER	1/4"	1
5	DEW POINT TEMP. SW.	250V, 16A	1
4	FAN CONTROLLER	4 ~ 7 BARG	1
3	FAN MOTOR	9W 4P #230	1
2	A/C CONDENSER	WIRE ON TUBE TYPE	1
1	REF. COMPRESSOR	RECIPROCATING TYPE	1

REV. NO.	DATE	DESCRIPTION	CHKD.	APP'D.	DATE
1	2008.01.11.	ISSUED FOR REFERENCE			


MANUFACTURER
GSA
GSA Instrumentation Division

TITLE
PIPING & INSTRUMENTATION DRAWING

ITEM NO. HYD/216 PART NO. GSA-HID-0007N2-02

SCALE NONE

REV. 1 DATE 04/23/04

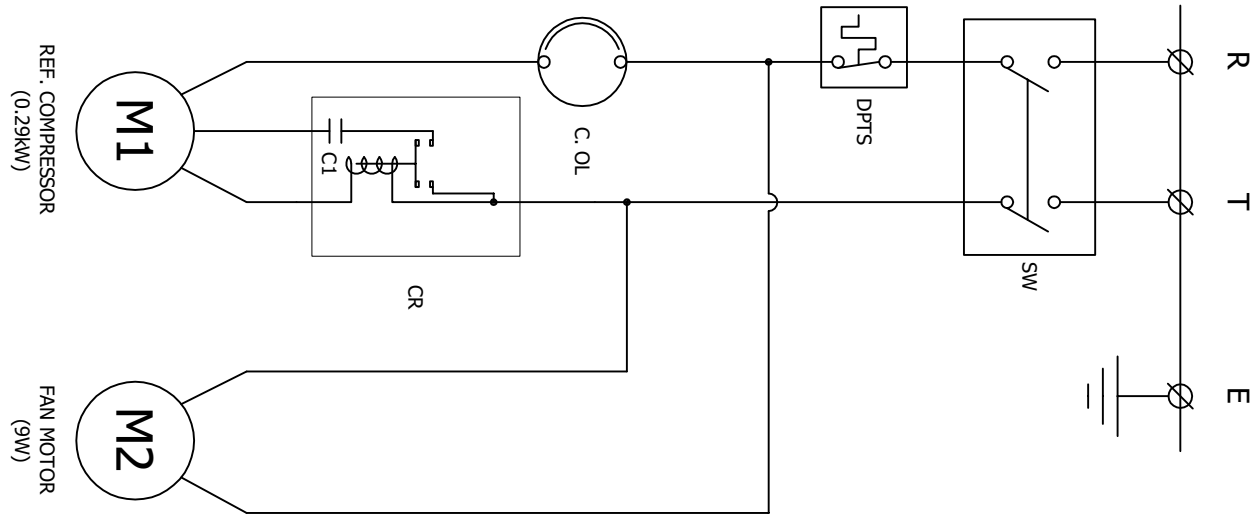

POWER SOURCE		
AC 220V, 1Ph, 60Hz		
7	DPTS	DEW POINT TEMP. SWITCH
6	C. O.L.	REF. COMPRESSOR OVERLOAD
5	SW	START SWITCH
4	C1	RUNNING CAPACITOR
3	CR	CURRENT RELAY
2	M2	FAN MOTOR
1	M1	REF. COMPRESSOR
NO.	SYMBOL	DESCRIPTION

REV. NO.	DATE	DESCRIPTION	CHK.	APP.	DATE	APP.
1	2023.01.11	ISSUED FOR REFERENCE				

DRAWING NUMBER: **GSA**
 TITLE: **WIRING DRAWING**
 TERN. NO.: **HWZ/NZ** DWG. NO.: **GSA-H1D-0007N2-03**
 SCALE: **NONE**
 (A4: 297mm x 210mm)